

Cheminax Twin Axial Cable

Small, lightweight twin axial cables



Applications

These small, lightweight cables are specially designed for use in MIL-STD-1553 data bus applications. Raychem materials technology allows the design and construction of cables that meet rigorous electrical and environmental performance requirements while minimizing size and weight.

Cheminax twin axial cables provide elegant solutions to an increasing range of data bus and multiplex signal transmission applications.

Features/Benefits


- Light weight, small size.
- Temperature range of -65°C to 200°C .
- Low capacitance.
- High data rates.
- Excellent shop handling.

Available in:

Americas

Europe

Asia Pacific

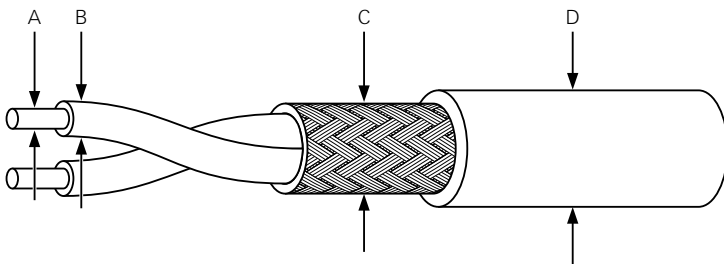

- A Conductor
- B Dielectric
- C Shield
- D Jacket

Fax-on-demand

US only (800) 260-9099

Outside US (650) 257-2301

Visit our website at www.tycoelectronics.com**Specifications/approvals**

Series	UL	Raychem
Cheminax cables	1837, 3258, 3259, and 3264	1200

Product dimensions*

Typical product part numbers	Impedance (ohms)	Capacitance pF/m (pF/ft)	A Conductor diameter mm (in)	B Dielectric diameter mm (in)	C Shield diameter mm (in)	D Jacket diameter mm (in)	Weight in kg/km (lb/1000ft)
5024A1661	50	104.7 (31.9)	.64 (.025)	0.89 (.035)	2.21 (.087)	2.62 (.103)	14.4 (9.7)
5026A1664	50	136.2 (41.5)	.48 (.019)	0.66 (.026)	1.75 (.069)	2.16 (.085)	10.0 (6.7)
7520A1662	75	74.2 (22.6)	1.02 (.040)	2.03 (.080)	4.60 (.181)	5.05 (.199)	42.9 (28.8)
7526J1660	75	88.6 (27.0)	.48 (.019)	0.99 (.039)	2.41 (.095)	2.82 (.111)	14.9 (10.0)
7820D0331	78	67.3 (20.5)	1.02 (.040)	2.11 (.083)	4.75 (.187)	5.72 (.225)	46.9 (31.5)
7824E0422	78	55.1 (16.8)	.64 (.025)	1.19 (.047)	2.82 (.111)	3.33 (.131)	19.6 (13.2)
0022E0311	100	49.2 (15.0)	.79 (.031)	1.98 (.078)	4.39 (.173)	5.16 (.203)	30.5 (20.5)
0024A0024	100	44.3 (13.5)	.64 (.025)	1.30 (.051)	3.02 (.119)	3.63 (.143)	25.1 (16.9)
0026A0024	100	44.0 (13.4)	.48 (.019)	1.14 (.045)	2.72 (.107)	3.23 (.127)	18.7 (12.6)
2524H0524	125	39.4 (12.0)	.64 (.025)	1.83 (.072)	4.09 (.161)	4.50 (.177)	25.3 (17.7)
2526E1114	125	36.1 (11.0)	.48 (.019)	1.40 (.055)	3.33 (.131)	3.73 (.147)	21.7 (14.6)
2530A0314	125	39.4 (12.0)	.30 (.012)	0.86 (.034)	2.16 (.085)	2.67 (.105)	10.6 (7.1)
10595-24	70	91.9 (28.0)	.64 (.025)	1.19 (.047)	2.82 (.111)	3.23 (.127)	17.9 (12.0)
10606-26	75	91.9 (28.0)	.53 (.021)	0.99 (.039)	2.41 (.095)	2.82 (.111)	13.4 (9.0)
10612-24	77	91.9 (28.0)	.64 (.025)	1.22 (.048)	2.90 (.114)	3.30 (.130)	23.7 (15.9)
10613-24	77	91.9 (28.0)	.64 (.025)	1.22 (.048)	3.33 (.131)	3.73 (.147)	39.0 (26.2)
10614-24	77	91.9 (28.0)	.64 (.025)	1.22 (.048)	3.73 (.147)	4.09 (.161)	40.3 (27.1)

*All dimensions are nominal.

Users should independently evaluate the suitability of the product for their application.
 Before ordering check with factory for most current data.

Cheminax Twin Axial Cable *(cont'd.)*

Small, lightweight twin axial cables

Product characteristics

General	Conductor range	20 AWG to 30 AWG
	Operating temperature range*	-65°C to 200°C
Electrical	Impedance range	50 ohms to 125 ohms
	Capacitance range	30 pF/ft to 10 pF/ft

*Temperature rating varies depending on materials used in specific construction.

Fax-on-demand

US only (800) 260-9099

Outside US (650) 257-2301

Visit our website at www.tycoelectronics.com**Properties (per SCD)**

Typical value of dielectric material						
Physical	Rayfoam L	Rayfoam H	Rayolin F	FEP (solid)	Radiation-crosslinked XL ETFE	
Tensile (min.)	6.8 MPa (1000 psi)	9.1 MPa (600 psi)	12.2 MPa (1800 psi)	6.8 MPa (1000 psi)	34 MPa (5000 psi)	
Elongation (min.)	50%	50%	200%	150%	50%	
Electrical						
Dielectric withstand (min.)	1000 V	1000 V	1000 V	1000 V	1000 V	
Velocity of propagation (nom.)	78%	78%	67%	69%	61%	
Permittivity (nom.)	1.65	1.65	2.2	2.1	2.7	
Typical value of jacket material						
Physical	Thermorad	SPEC 55	FlexLine	FEP	Zerohal	SPEC 44
Tensile (min.)	13.6 MPa (2000 psi)	34 MPa (5000 psi)	20.4 MPa (3000 psi)	13.6 MPa (2000 psi)	8.2 MPa (1200 psi)	27.2 MPa (4000 psi)
Elongation (min.)	250%	50%	100%	200%	150%	200%
Temperature (max.)	125°C	200°C	200°C	200°C	125°C	150°C
Flammability**	Method C	Method B	Method B	Method B	Method B	Method B
Fluid category**	C	A	A	A	C	B

*See Raychem specification WCD-1200 for details.